

INDEPENDENT BATTERY CERTIFICATE



CERTIFICATE NUMBER: D269545A-230B-4A10-A80F-351DA1A43E35

VEHICLE

BRAND: MG Automotive
MODEL: ZS EV - 44,5 kWh

MILEAGE: 12,511 mi
VIN: LSJW74091LZ213324
DATE AND TIME:
21.10.2025, 10:06:13

EXECUTED BY: Henley Cars Ltd t/a
Car360

RESULTS

STATE OF HEALTH (SOH)



ENERGY

- kWh | 43kWh




WLTP RANGE

- | 176mi

RATING

BENCHMARKING

How does your vehicle
compare to comparable
vehicles?

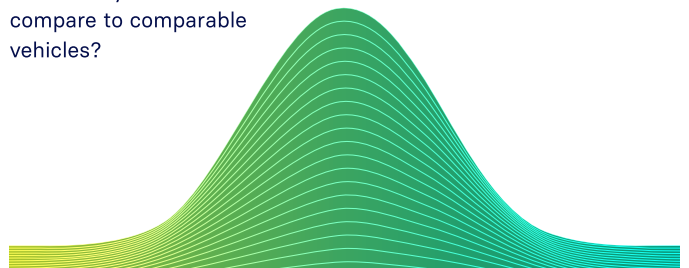

below average

average

above average

CHECKS

Battery Management System (BMS) ✓

Battery Sensor ✓

Battery Measurements - safety risk detected !

Battery Cell Voltages ✓

Vehicle Communication ✓



SCAN FOR
DETAILS

EVALUATION

SAFETY RISK! - POTENTIAL SAFETY HAZARD

During the detailed battery diagnosis with the AVILOO FLASH Test, safety concerning anomalies were detected that require immediate inspection. For Details scan the QR code.

For assistance, please contact AVILOO Customer Management.

Marcus Berger

Dr. Marcus Berger, CEO



ENERGY

	Gross	Net (Nominal)	Usable
Current:			
New:	44.5kWh	42.5kWh	39.7kWh

RANGE

	WLTP	Typical
Current:		
New:	263-176mi	121mi

EXECUTION PROTOCOL

AVILOO Box connected.	10:06:09
FLASH Test started.	✓
Starting data acquisition.	✓
Vehicle detected.	✓
Finished data acquisition.	✓
Analyzing data.	✓
Analysis completed.	✓

MESSAGES

It has been determined that there is a discrepancy between the highest and lowest charged cells, as illustrated in the cell voltage table above. This indicates an issue with battery balancing. Please take your vehicle to a workshop or contact AVILOO Customer Management for further assistance.

SENSORS

Voltage Sensor	✓
Current Sensor	✓
Temperature Sensors	✓
Cell Voltage Sensors	✓

BMS

	Value	Status
BMS State of Charge (SoC)*:	63%	
SoC calculation accuracy:		✓
BMS State of Health (SoH)*:	93%	
SoH calculation accuracy:		✓

MEASUREMENTS

	Min	Max	Delta	Status
Battery Temperature	11.0°C	12.0°C	1.0°C	✓
Cell Voltage	3.748V	3.823V	75mV	!
Pack Voltage	411.7V			
Average Current	-13.6A			

*The values shown here were not calculated by AVILOO but correspond to the values read out from the battery management system (BMS) and were calculated by the manufacturer. AVILOO therefore assumes no liability for their accuracy.

DISCLAIMER: The test result includes the currently calculated state of health (SoH) of the drive battery. The determination is based on data provided by the vehicle. These are evaluated by AVILOO's algorithms using statistical and analytical models. Manipulation of the data in the control unit leads to an incorrect result. The indicated SoH has a technically induced fluctuation range (deviation) of no more than 3% in at least 95% of reference measurements. It should be noted that this tolerance applies to the SoH determination at the cell level and not to the SoH of the entire battery. This is because the state of charge of individual cells may vary, which can negatively affect the current SoH of the battery. However, this can be compensated by the Battery Management System (BMS) or during a calibration. The result reflects the condition of the battery at the time of the test. No conclusions can be drawn about the future state of health of the battery from this. Statements about mechanical damage or external influences are not part of this diagnosis.