

INDEPENDENT BATTERY CERTIFICATE



CERTIFICATE NUMBER: E53D1368-CF60-4290-BAC2-8695E211499E

VEHICLE

BRAND: BMW
MODEL: i4 - 83,9 kWh

MILEAGE: 25,682 mi
VIN: WBY72AW070FT21714
DATE AND TIME:
03.12.2025, 13:05:58

EXECUTED BY: Henley Cars Ltd t/a
Car360

RESULTS

STATE OF HEALTH (SOH)

96.7 %

ENERGY

78kWh | 81kWh




WLTP RANGE

354mi | 366mi

RATING

BENCHMARKING

How does your vehicle
compare to comparable
vehicles?

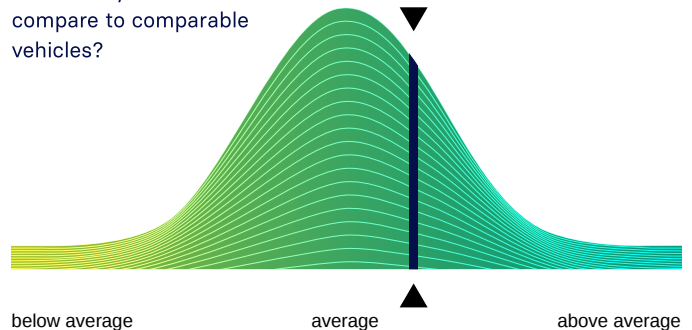

CHECKS

Battery Management System (BMS) ✓

Battery Sensor ✓

Battery Measurements ✓

Battery Cell Voltages ✓

Vehicle Communication ✓



SCAN FOR
DETAILS

EVALUATION

EXCELLENT HEALTH - NO ABNORMALITIES DETECTED

Based on the detailed battery diagnostics performed with the AVILOO FLASH Test, we hereby
certify that the drive battery of this vehicle is in excellent condition.

The drive battery is therefore officially AVILOO Certified.

Marcus Berger

Dr. Marcus Berger, CEO



ENERGY

	Gross	Net (Nominal)	Usable
Current:	81.1kWh	78.4kWh	76.4kWh
New:	83.9kWh	81.1kWh	79.0kWh

RANGE

	WLTP	Typical	Individual
Current:	402-354mi	242mi	277mi
New:	416-366mi	250mi	286mi

EXECUTION PROTOCOL

AVILOO Box connected. 13:05:54

FLASH Test started.	✓
Vehicle detected.	✓
Starting data acquisition.	✓
Finished data acquisition.	✓
Analyzing data.	✓
Analysis completed.	✓

SENSORS

Voltage Sensor	✓
Current Sensor	✓
Temperature Sensors	✓
Cell Voltage Sensors	✓

BMS


	Value	Status
BMS State of Charge (SoC)*:	10%	
SoC calculation accuracy:		✓
BMS State of Health (SoH)*:	96%	
SoH calculation accuracy:		✓

MEASUREMENTS

	Min	Max	Delta	Status
Battery Temperature	13.3°C	14.1°C	0.8°C	✓
Cell Voltage	3.471V	3.478V	6mV	✓
Pack Voltage	375.9V			
Average Current	-5.5A			

CELL VOLTAGES DIAGRAM

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
1 - 20	3.475	3.473	3.476	3.475	3.477	3.478	3.476	3.477	3.476	3.475	3.471	3.473	3.475	3.473	3.475	3.473	3.477	3.477	3.477	3.477
21 - 40	3.477	3.477	3.476	3.477	3.473	3.476	3.477	3.477	3.476	3.476	3.478	3.478	3.476	3.478	3.471	3.475	3.473	3.476	3.476	3.475
41 - 60	3.477	3.476	3.475	3.477	3.476	3.476	3.477	3.476	3.476	3.476	3.477	3.477	3.475	3.475	3.475	3.476	3.476	3.477	3.476	3.477
61 - 80	3.475	3.476	3.475	3.475	3.475	3.475	3.476	3.476	3.473	3.475	3.477	3.476	3.476	3.476	3.476	3.477	3.475	3.473	3.473	3.475
81 - 100	3.476	3.476	3.476	3.476	3.476	3.476	3.475	3.473	3.477	3.478	3.477	3.478	3.476	3.478	3.477	3.477	3.473	3.475	3.472	3.472
101 - 108	3.473	3.473	3.477	3.477	3.476	3.476	3.477	3.477	/	/	/	/	/	/	/	/	/	/	/	/

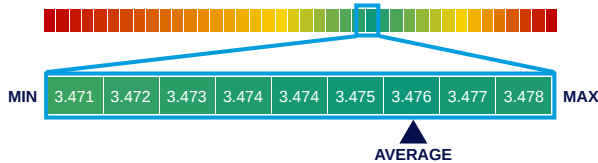

*The values shown here were not calculated by AVILOO but correspond to the values read out from the battery management system (BMS) and were calculated by the manufacturer. AVILOO therefore assumes no liability for their accuracy.

DISCLAIMER: The test result includes the currently calculated state of health (SoH) of the drive battery. The determination is based on data provided by the vehicle. These are evaluated by AVILOO's algorithms using statistical and analytical models. Manipulation of the data in the control unit leads to an incorrect result. The indicated SoH has a technically induced fluctuation range (deviation) of no more than 3% in at least 95% of reference measurements. It should be noted that this tolerance applies to the SoH determination at the cell level and not to the SoH of the entire battery. This is because the state of charge of individual cells may vary, which can negatively affect the current SoH of the battery. However, this can be compensated by the Battery Management System (BMS) or during a calibration. The result reflects the condition of the battery at the time of the test. No conclusions can be drawn about the future state of health of the battery from this. Statements about mechanical damage or external influences are not part of this diagnosis.